

MITEL

Unified Communicator Express

IT Quick Reference Guide

Configuring a Softphone on a Mitel 3300

Release 0.1



NOTICE

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Networks™ Corporation (MITEL®). The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes.

No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

TRADEMARKS

Mitel and the Mitel Logo are trademarks of Mitel Networks Corporation.

Mitel Unified Communicator Express and UC Express are trademarks of Mitel Networks Corporation or its Licensors.


Windows and Microsoft are trademarks of Microsoft Corporation.

Adobe Acrobat Reader is a registered trademark of Adobe Systems Incorporated.

Other product names mentioned in this document may be trademarks of their respective companies and are hereby acknowledged.

Unified Communicator Express IT Quick Reference Guide
Release #0.1
July 2009


®,™ Trademark of Mitel Networks Corporation
© Copyright 2009, Mitel Networks Corporation
All rights reserved

 NOTE: The information in this guide will be added into the IT Guide at a later date.

Configuring a Mitel Unified Communicator Express 3.0 Softphone on a Mitel 3300

1. Login to ESM
2. Navigate to Multiline IP Set Configuration
3. Add a phone of type "Generic SIP Phone"
4. Set the Number. This is the DN for the softphone.
5. Set the User PIN. This is the User password for the softphone.
6. Save

You can also add a SIP phone user from the "User Configuration" page. It allows you to provide a name for the user, provision voicemail, etc.

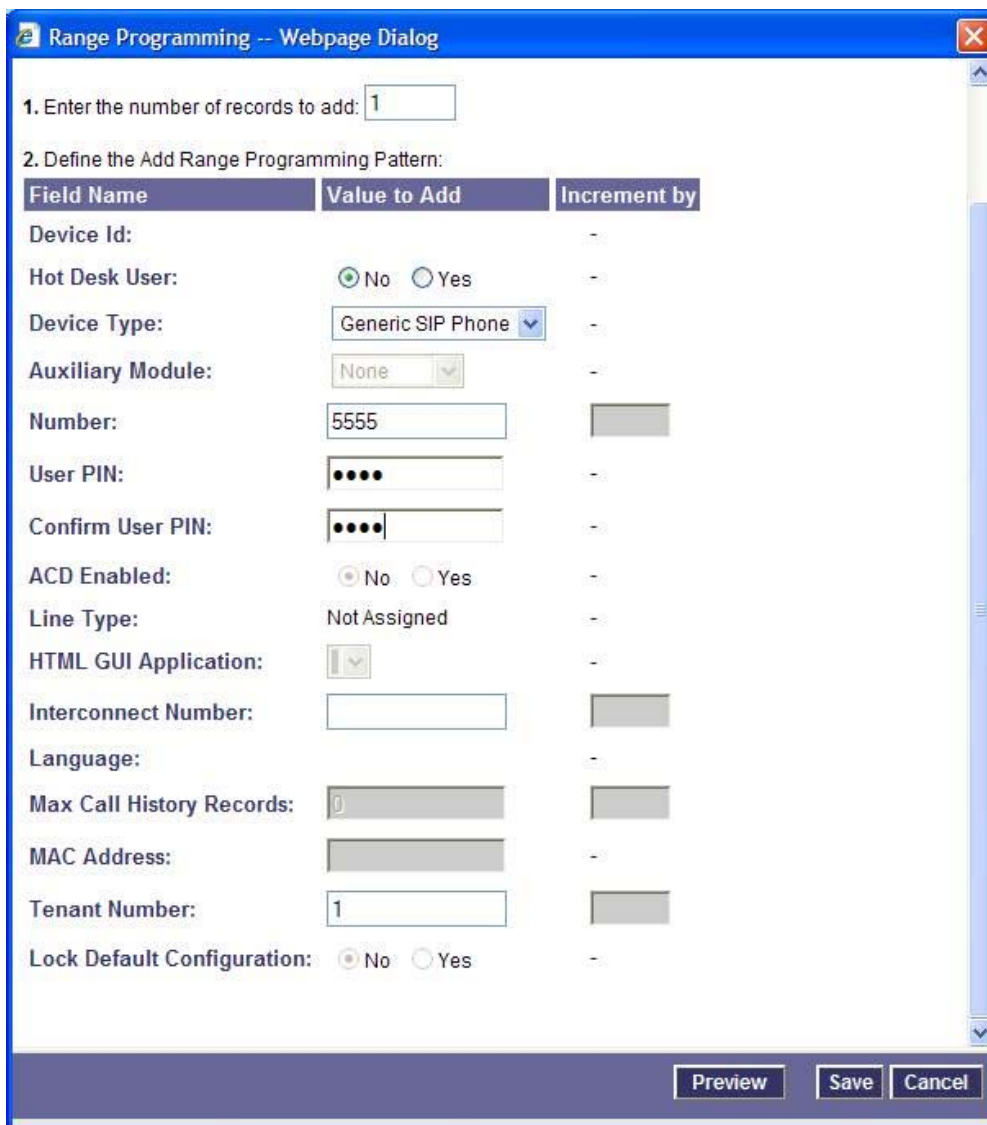

The screenshot shows a web-based configuration dialog titled "Range Programming -- Webpage Dialog". It contains the following fields and options:

- 1. Enter the number of records to add:
- 2. Define the Add Range Programming Pattern:

Field Name	Value to Add	Increment by
Device Id:		-
Hot Desk User:	<input checked="" type="radio"/> No <input type="radio"/> Yes	-
Device Type:	Generic SIP Phone	-
Auxiliary Module:	None	-
Number:	5555	
User PIN:	••••	-
Confirm User PIN:	••••	-
ACD Enabled:	<input checked="" type="radio"/> No <input type="radio"/> Yes	-
Line Type:	Not Assigned	-
HTML GUI Application:		-
Interconnect Number:		
Language:		-
Max Call History Records:	0	
MAC Address:		-
Tenant Number:	1	
Lock Default Configuration:	<input checked="" type="radio"/> No <input type="radio"/> Yes	-

Buttons at the bottom: Preview, Save, Cancel



Global Headquarters	U.S.	EMEA	CALA	Asia Pacific
Tel: +1(613) 592-2122 Fax: +1(613) 592-4784	Tel: +1(480) 961-9000 Fax: +1(480) 961-1370	Tel: +44(0)1291-430000 Fax: +44(0)1291-430400	Tel: +1(613) 592-2122 Fax: +1(613) 592-7825	Tel: +852 2508 9780 Fax: +852 2508 9232

www.mitel.com

For more information on our worldwide office locations, visit our website at www.mitel.com/offices

THIS DOCUMENT IS PROVIDED TO YOU FOR INFORMATIONAL PURPOSES ONLY. The information furnished in this document, believed by Mitel to be accurate as of the date of its publication, is subject to change without notice. Mitel assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains.

M MITEL (design) is a registered trademark of Mitel Networks Corporation. All other products and services are the registered trademarks of their respective holders.
© Copyright 2009 Mitel Networks Corporation. All Rights Reserved.

